



**SINGLE COMPARTMENT
FLOOR MODEL TYPE-GAS-FIRED
COMBI OVEN / STEAMER**

General Specifications :

- Multi-Purpose Oven offers Pressureless Convection cooking in a variety of cooking modes; featuring Automatic Reversible Fan operation for superior Convection Cooking.
 - Hot Air Convection.
 - Pressureless Convection Steamer.
 - Combination of Convection Steamer and Hot Air.
- Reliable, easy to operate mechanical controls feature:
 - One 100-minute Mechanical Dial Timer Control.
 - One 125-500 C° degree Mechanical Dial Temperature control.
 - One Mechanical Dial Control for three modes of cooking operation; Hot Air, Steaming or Combi.
 - Automatic Fast Cool Down Control.
 - Humidity Release Control removes excess moisture from Compartment.
 - Generator Drain Control.
- User-friendly control panel has many standard features for superior cooking performance.
- Oven Compartment comes with Three Stainless Steel Wire Shelves.
- Fully-insulated Cooking Compartment and Steam Generator for thermal efficiency. Easy to clean Die Pressed interior compartment features a Coved Corner design.
- Heavy Gauge Stainless Steel Gas-Fired Steam Generator with 38,000 BTU Power Rating; features an easy Access Delimiting Port and Electronic Spark Ignition for easy start-up. Reliable Electronic Controls monitor Water Level and safety functions in steam generator.
- One Removable Stainless Steel Oven Rack Cassette. Can be used with optional Transport Cart.
- Standard with Adjustable Left-Hand Door Hinging and Large Glass Window to observe cooking operation. Removable Double Door Gasket Seal prevents leaking. Safety Switch stops fan when compartment door is opened.
- Compartment Door Condensate Drip Tray automatically empties into floor drain.
- NSF Approved 6" Stainless Steel Adjustable Legs: provides one inch level adjustment.
- Standard voltage for controls is 115 volts, 60 Hz, single phase.
- Each compartment has the capacity for:
 - Seven, 13" x 18" U.S. Bake Pans.
 - Three, 12" x 20" x 2½" Steam Table Pans.

MODEL: MG-106X



MG-106X


shown on support with rack holder and equipment stand

MODEL AVAILABLE

Shall be BURLODGE/LAINOX Combi Oven, Floor Type Multi-Purpose Oven, Model MG - 106X for _____ gas operation, _____ volts, _____ Hz, _____ phase. Cooking modes for: Hot Air Convection; Low and High Temperature Convection Steam; combination of Hot Air and Steam; variable Steam Exhaust Condensation Control; Butterfly Valve to regulate humidity exhaust; and Mechanical Controls.

Options and Accessories:

- Transport Cart Model (CS-110)
- Additional Oven Rack Cassette Model (SG-106)
- Grease Filter Model (FX-106)
- Additional Stainless Steel Wire Shelves
- Steam Table Pans in depths of 1", 2½" or 4"
- Spray Hose with 60" Flexible Hose for Cleaning (SH-60)
- Dissolve® Liquid Descaling Kit (10617413)
- Correctional Packages
- Accessories for handling and transportation compatible with Blast Chillers/Freezers

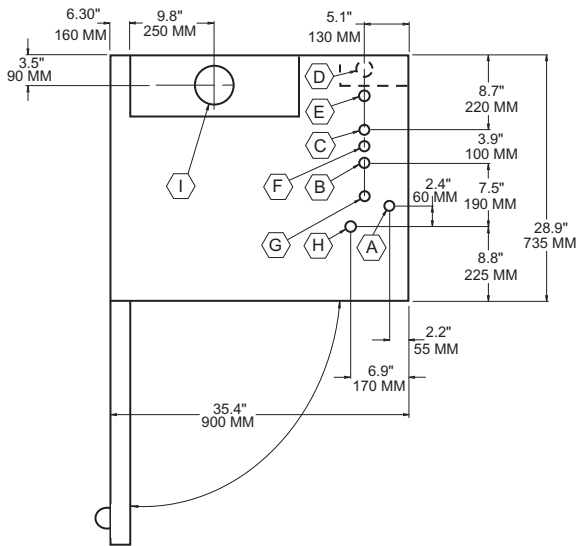


- **Compartment has capacity for:**
 - Seven, 13" x 18" U.S. Bake Pans
 - Seven, 12" x 20" x 1" Steam Table Pans or Three, 12" x 20" x 2½" Steam Table Pans
- Many local codes exist and it is the responsibility of the owner and installer to comply with those codes.
- **Burlodge / Lainox** equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are: UL, A.G.A., NSF, ASME/N.Bd., CSA, CGA, ETL, and others.

WATER QUALITY REQUIREMENT

The recommended minimum water quality standards whether untreated or pre-treated, based upon 10 hours of use per day, and a Daily Blowdown, are as follows:

TOTAL DISSOLVED SOLIDS	less than	60 parts per million
TOTAL ALKALINITY	less than	20 parts per million
SILICA ¹	less than	13 parts per million
CHLORIDE ²	less than	30 parts per million
pH FACTOR ³	greater than	7.5

Consult a local water treatment specialist for an on-site water analysis for recommendations concerning steam generator feed water treatment (if required), in order to remove or reduce harmful concentrations of minerals. The use of highly mineralized water will mean that more frequent servicing of the steam generator will be necessary. The fact that a water supply is potable is not proof that it will be suitable for the generator.

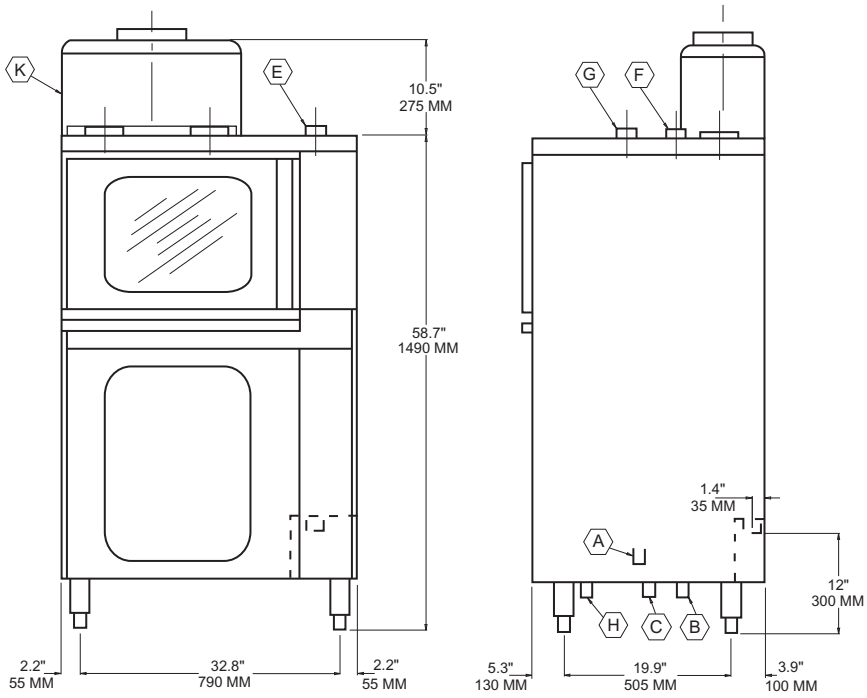

UTILITY CONNECTIONS

- Ⓐ = ELECTRIC CONNECTION
- Ⓑ = COLD WATER INLET 3/4" NHT.
- BOILER Ⓒ = COLD WATER INLET 3/4" NHT.
- CONDENSER Ⓓ = DRAINAGE 2.00" DIA (51 MM)
- Ⓔ = DESCALER INLET
- Ⓕ = WASTE AIR OUTLET
1.18" DIA (30 MM)
- Ⓖ = CHAMBER WASTE AIR OUTLET
- Ⓗ = GAS CONNECTION 3/4" DIA.
- Ⓘ = GAS CONNECTION 3/4" NHT.
- Ⓝ = EXHAUST CHIMNEY BOILER
- Ⓚ = EXHAUST MANIFOLD

SHIPPING WEIGHT	= 443 Lbs.
MAX. WATER CONSUMPTION PER HR. STEAM PRODUCTION	= 2.4 Gal./Hr
AVERAGE WATER CONSUMPTION PER HR. STEAM CONDENSER	= 4.2 Gal./Hr
TOTAL WATER CONSUMPTION	=6.6 Gal./Hr

MODEL	GAS	ELECTRIC (3 PH)	WATER	DRAINAGE (D)	CLEARANCE																				
MG - 106X ONE COMPARTMENT FLOOR MODEL TYPE GAS-FIRED	<table border="1"> <tr> <th>(BTU)</th> <th>SUPPLY PRESSURE</th> </tr> <tr> <td>HOT AIR 38,000</td> <td>NATURAL</td> </tr> <tr> <td>BOILER 38,000</td> <td>4.50" W.C. MINIMUM 14.00" W.C. MAXIMUM</td> </tr> <tr> <td>COMBI 60,500</td> <td>PROPANE</td> </tr> <tr> <td></td> <td>11.00" W.C. MINIMUM 14.00" W.C. MAXIMUM</td> </tr> </table> <p>MANUFACTURER MUST BE NOTIFIED IF UNIT WILL BE USED ABOVE 2,000 FT. ALTITUDE</p>	(BTU)	SUPPLY PRESSURE	HOT AIR 38,000	NATURAL	BOILER 38,000	4.50" W.C. MINIMUM 14.00" W.C. MAXIMUM	COMBI 60,500	PROPANE		11.00" W.C. MINIMUM 14.00" W.C. MAXIMUM	<table border="1"> <tr> <th>ELECTRICAL DATA</th> <th>115/60/1</th> </tr> <tr> <td>MINIMUM WIRE</td> <td>15</td> </tr> <tr> <td>AMPACITY (AMPS)</td> <td>15</td> </tr> <tr> <td>MAXIMUM TIME DELAY FUSE</td> <td>15</td> </tr> <tr> <td>MAXIMUM TIME DELAY FUSE</td> <td>9</td> </tr> </table>	ELECTRICAL DATA	115/60/1	MINIMUM WIRE	15	AMPACITY (AMPS)	15	MAXIMUM TIME DELAY FUSE	15	MAXIMUM TIME DELAY FUSE	9	35 PSI MINIMUM 60 PSI MAXIMUM Ⓒ 3/4" NHT (GARDEN HOSE) FOR BOILER & CONDENSER	2" DIA. (51 MM) DO NOT CONNECT ANY OTHER UNITS TO THIS DRAIN DRAIN LINE MUST BE VENTED	RIGHT = 6" LEFT = 6" REAR = 7" NOTE: 20" RIGHT SIDE CLEARANCE IS REQUIRED IF PLACED NEXT TO HEAT SOURCE
(BTU)	SUPPLY PRESSURE																								
HOT AIR 38,000	NATURAL																								
BOILER 38,000	4.50" W.C. MINIMUM 14.00" W.C. MAXIMUM																								
COMBI 60,500	PROPANE																								
	11.00" W.C. MINIMUM 14.00" W.C. MAXIMUM																								
ELECTRICAL DATA	115/60/1																								
MINIMUM WIRE	15																								
AMPACITY (AMPS)	15																								
MAXIMUM TIME DELAY FUSE	15																								
MAXIMUM TIME DELAY FUSE	9																								

BURLODGE/LAINOX reserves right of design improvement or modification, as warranted.

BURLODGE™

BURLODGE CANADA LTD
10, EDVAC DRIVE
BRAMPTON
ONTARIO L6S 5P2
CANADA
TEL. 905 790.1881
TOLL FREE: 1 888 609.5552
FAX 905 790.1883
E-mail: info@burlodgeca.com
www.burlodgecanada.com

BURLODGE CANADA LTEE
5995 boul. GOUIN OUEST
BUREAU B-305
MONTREAL, QUEBEC H4J 2P8
CANADA
TEL. 514 339.5552
TOLL FREE: 1 888 609.5552
FAX. 514 339.2555
E-mail: infoquebec@burlodgeca.com
www.burlodgecanada.com

BURLODGE USA Inc.
P.O. BOX 4088
3760 INDUSTRIAL DRIVE
WINSTON - SALEM
NORTH CAROLINA 27115 - USA
TEL. 336 776 1010
TOLL FREE: 1 877-REThERM
FAX 336 776 1090
E-mail: info@burlodgeusa.com
www.burlodgeusa.com



ASSOCIATED COMPANIES
BURLODGE GREAT BRITAIN
BURLODGE ITALY
BURLODGE FRANCE
BURLODGE HOLLAND
BURLODGE BELGIUM